

#### SPECIFICATIONS

Capacity <sup>(1)</sup>		70 ppd
Energy Factor <sup>(1)</sup>		2.1 L/kW-h
Airflow @ varying E.S.P. (external static pressure - dry coil)		
	0.0" w.c.	200 CFM
	0.2" w.c.	170 CFM
	0.4" w.c.	140 CFM
Current draw <sup>(1)</sup>		5.8 Amps
Noise	53 dBA ducted	58 dBA unducted
Dimensions: (cabinet only) <sup>(2)</sup>	Width	12.5"
	Height	12.5"
	Length	25.0"
Weight		56 lbs.
Inlet air operating conditions during		
-Dehumidification:		50°F – 104°F, 40°F dew point min.
-Ventilation:		40°F – 140°F, 0% – 99%RH (non-condensing)

<sup>(1)</sup> Rated capacity and energy factor test done and current draw measured in accordance with AHAM DH 1 2008 at 80°F/60%RH inlet air at 0.0 ESP. <sup>(2)</sup> Height does not include adjustable feet. The width excludes the filter doors and length excludes the duct collars.

#### FEATURES

Control <sup>(3)</sup>	Front mount only
Air discharge orientation	End of cabinet only
Duct collars	8"
Backdraft damper	No
Filter	1/2" MERV 8 washable
Refrigerant	R410A
Coil type	Aluminum
Power cord length	8 ft
Hardwire option	No
Discharge air temperature rise	10°F – 30°F
Drain connection <sup>(4)</sup>	3/4" MNPT Threaded

<sup>(3)</sup> Built-in automatic control capable to be set up for dehumidification and ventilation or zoning.

<sup>(4)</sup> Adapters for threaded connection for plastic hose included.



#### PRINCIPLE OF OPERATION

The Moisture Medic Model HC70 Dehumidifier is designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit.


Dehumidification occurs until the set point is reached, then shuts off until periodic sampling determines a need for operation.

#### APPLICATION

The Moisture Medic Model HC70 Dehumidifier is the perfect product for dehumidification of crawlspaces, basements, and precise management of humidity in controlled environment agriculture.

#### VENTILATION/CIRCULATION

The Model HC70 has the ability to bring in fresh air and circulate air in the dehumidified space. Fresh air will dilute stale air and pollutants and can reduce humidity in the winter months. Circulating the air will even out the temperature and relative humidity in the space eliminating variations in the environment. The HC70 has built-in controls to adjust the amount of fresh air ventilation and the amount of air circulation.

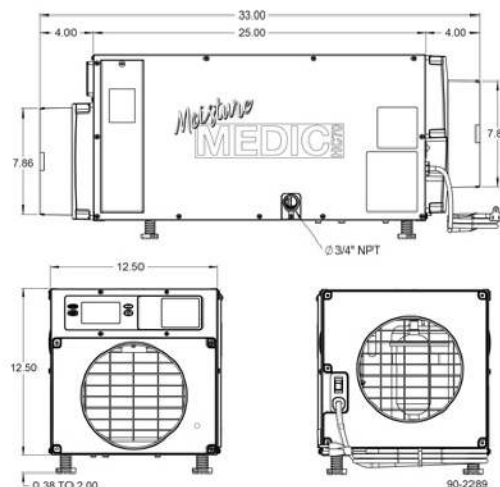


# Installation Options For the Moisture Medic Model HC70 Dehumidifier

## APPLICATIONS


### Inlet and Outlet ducted

- Ducted with 8" flex duct or hard pipe
- Circulates air to equalize relative humidity and temperature



### Inlet and Outlet ducted to dedicated grilles

- Dries a specific area that has a moisture issue (crawlspace, basement, CEA, etc.)
- Dehumidifier can be located in the closet, mechanical room or unfinished area and ducted into the space requiring dehumidification
- Grille and duct kit available - Model #5546



### Freestanding

- Air is pulled into the dehumidifier directly from the space, dehumidified, and returned back to the space



## Optional Wall-Mount Controls



### Model 8920W with IAQ Control

- Universal 3H/3C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity and Ventilation
- 2 Part - 3-Wire design
- Full color Wi-Fi touch screen



### Model 76 Wall Mount Dehumidifier Control

- On/Off buttons
- Wall mounted living space control
- Displays RH and controls to an RH value
- Remote control for crawlspace applications and sealed attics



### Model 8910/8910W with IAQ Control

- Universal 3H/3C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity and Ventilation
- 2 Part - 3-Wire design
- Wi-Fi touch screen (8910W)



### Model 8620/8620W with IAQ Control

- Universal 2H/2C or 4H/2C HP
- Event-Based™ Air Cleaning
- Humidity or Ventilation
- Wi-Fi touch screen (8620W)



### MODEL 76 SPECIFICATIONS

Electrical	External	Remote
Input voltage and current	Voltage: 24VAC +/-20% Current: 25mA (nominal), 50mA (max.) at 24VAC	Voltage: 35VDC (supplied by dehumidifier control board)
Output	Dry contact, normally open	Communication (RS485)
Control	External	Remote
Control range	40%-80% RH	1 (less dry) - 7 (more dry) 65°F - 40°F dew point
Accuracy	+/-5% RH	See dehumidifier specifications
Differential	3% RH	
Low limit	40°F dew point	50°F dry bulb, 40°F dew point min.
High limit	99°F dry bulb	105°F dry bulb